

1400 LED 2835 SMD PCB 20 mm 3 oz double row / dwurzędowa / zweireihige

✓ 3 years guarantee

3 lata gwarancji / 3 Jahre Garantie

✓ Careful selection of LEDs, providing an even color of the light


Staranna selekcja diod LED, zapewniająca równomierną barwę światła / Sorgfältige ausgesuchte LED-Dioden, die eine gleichmäßige Lichtfarbe garantieren

✓ High quality PCB - 3oz

Wysokiej jakości podkład PCB 3oz / Hochwertiges PCB Untergrund - 3oz

✓ Double-sided thermally conductive adhesive tape

Dwustronna termoprzewodząca taśma klejąca / Beidseitiges wärmeleitendes Klebeband

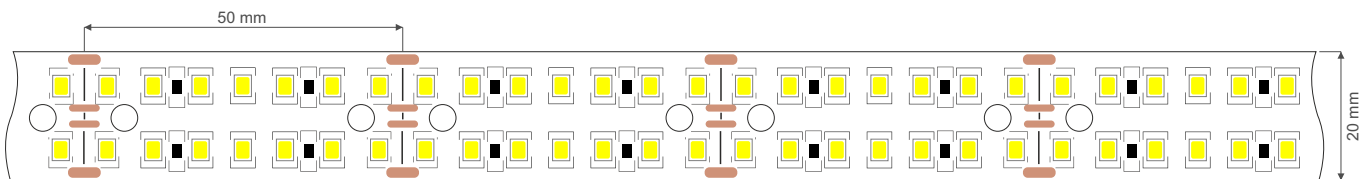

TECHNICAL DATA DANE TECHNICZNE / TECHNISCHE DATEN



Voltage Napięcie / Spannungsversorgung	24V DC
Power Moc / Nennleistung	25 W/m
PCB width Szerokość PCB / PCB Breite	20mm
Color / Index Barwa/Index / Farbe/Index	2900 - 3100K / 16-2038-01
	3900 - 4150K / 16-2037-01
	6100 - 6500K / 16-2036-01

IP rating Stopień ochrony IP / IP-Klasse	IP 20
Warranty Gwarancja / Garantie	36 months
Ra	≥ 80 CRI
Type of LED Typ diody / LED typ	2835 SMD
Luminous efficacy Skuteczność świetlna / Lichtausbeute	120 lm/W
Temperature range Zakres temperatur / Arbeitstemperatur	-20° C - +60° C
Luminous flux Strumień świetlny / Lichtstrom	3000 lm/mb

LED Labs Lighting


The light fixture includes built-in led diodes

LED

No replace diodes in light fixture

874/2012

125kWh/1000h



Produced in PRC for: LED Labs Sp. z o.o., Zakopiańska 2C, 30-418 Cracow, Poland

